

ANALOG CAPACITIVE ACCELEROMETER

DynaLabs

DYN-C-1000-SI

Capacitive accelerometers are based on proven micro-electro-mechanical systems (MEMS) technology.



These capacitive accelerometers are reliable and long-term stable. They have a DC response. The advantage of these sensors is their outstanding temperature stability, their high-frequency response and they are low noise-high resolution features. These sensors have a reliable aluminum housing with IP68 protection class. Dynalabs 1000SI series uniaxial accelerometers provide an ultra-low noise performance from 0.7 to 1.2 $\mu\text{g}/\sqrt{\text{Hz}}$. These accelerometers provide excellent bias and scale factor stability and a wide frequency range ($\pm 3\text{dB}$) from 550 Hz to 700 Hz.



Features

- Accurate DC measurement
- Voltage Output
- Wide frequency response
- High shock protection
- Ultra-low noise, low power
- High resolution
- Gas damping



Application Areas

- Seismic measurements
- Structural monitoring and testing
- Safety systems measurements
- Noise measurements

		1003SI	1005SI
Full-scale Acceleration	(g)	± 3	± 5
White Noise	($\mu\text{g}/\sqrt{\text{Hz}}$)	0.7	1.2
Noise (Integrated over 0.1Hz to 100Hz)	(μg)	8	13
Dynamic range (0.1Hz to 100Hz)	(dB)	108.5	108.5
Scale Factor Sensitivity	(mV/g)	900	540
Bandwidth ($\pm 3\text{dB}$)	(Hz)	550	700
Operating power consumption	(mW)	90	90



DYNALABS MUHENDISLIK LTD STI

Ostim OSB Mah. 100 Yil Bulvarı Ostim
No:55B/11 Yenimahalle 06374 Ankara
TURKEY

Phone: +90 312 386 21 89



Mail: dynalabs@dynalabs.com.tr

Web: www.dynalabs.com.tr

DynaLabs

ANALOG CAPACITIVE ACCELEROMETER

DYN-C-1000-SI

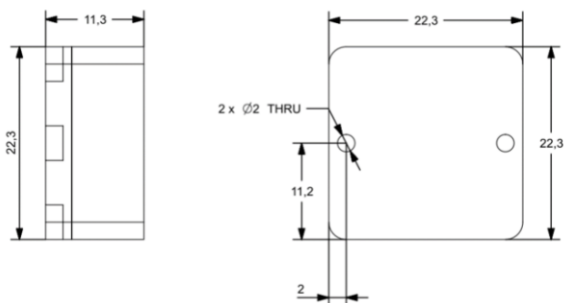

OPTIONS:

- Custom Cable Length (5m standard cable)
- Custom Housing Material
- Custom Connector
- Base plate

Standard length of the integrated cable is 5 meters. But, based on request customized cable lengths are possible.

Standard version has no connector at the cable end. However, it is possible to assemble connector during production.

CABLE CODE/PIN CONFIGURATION:

- RED : V + Power supply voltage +6 to +40 VDC
- BLACK : GROUND Power GND
- X : Yellow : Signal(+) Positive, analog output voltage signal for differential mode
Blue : Signal (-) Negative, analog output voltage signal for differential mode

Cable: 4x #28 AWG Conductors PFA Insulated, Braided Shield, TPE Jacket

Protection Level	Operating Voltage	Operating Temperature	Weight (without cable)
IP 68	6 V - 40 V	-40 °C to +100 °C	15 g (aluminum) 30 g (steel)
Housing Material	Connector (Optional)	Mounting	Base plate (Optional)
Aluminum or Steel	D-Sub 9 or 15 pin, Lemo, Binder	Adhesive or screw mount	Aluminum or Steel



DYNALABS MUHENDISLIK LTD STI

Ostim OSB Mah. 100 Yil Bulvarı Ostim
No:55B/11 Yenimahalle 06374 Ankara
TURKEY

Phone: +90 312 386 21 89

Mail: dynalabs@dynalabs.com.tr

Web: www.dynalabs.com.tr