

DYNALABS SHAKER AMPLIFIER

DYN-SA-150

DynaLabs



SA-150 amplifier is used for Inertial shakers and also for PM-10 shaker.



All inertial shakers are using the same amplifier box. This box is also capable of generating sinus signals and can be used for 3rd party shakers as well. Small, all-in-one and can be customized to give different signals like white or pink noise or different forms.

Adjustable gain	Yes
External Signal Input	Yes
External Input Voltage	1 VAC (Peak)
Amplifier Weight	0.65 kg
Dimensions W x H x D (mm)	102 x 46 x 102 mm
Power Supply Voltage	24 V DC
Power Supply Current	5 A
AC Output	24 V
Current Limiting (Load current)	Max: 15 A

Technical Drawings:

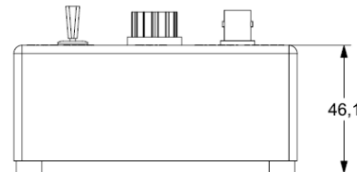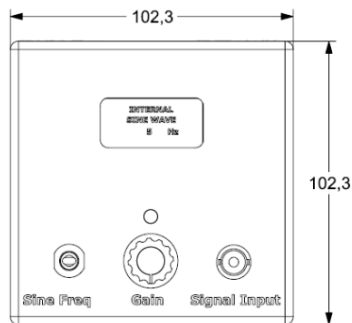

DYNALABS MUHENDISLIK LTD STI

Ostim OSB Mah. 100 Yil Bulvarı Ostim
No:55B/11 Yenimahalle 06374 Ankara
TURKEY

Phone: +90 312 386 21 89

Mail: dynalabs@dynalabs.com.tr

Web: www.dynalabs.com.tr